

# MOUNTS

## Anti-Vibration

### SM-Series

The Sunnex SM-Series offers economic vibration damping designed for installation of light to medium-duty machinery, particularly in the rubber production industry.

The SM leveling elements are comprised of an SP-Series machine pad and a load distribution plate made of a high-grade cast iron.

For leveling purposes you can choose from a range of leveling bolts based on specific requirements.

Standard leveling element models include:

SM = square

Leveling bolts are available in the following sizes:

Item No.	Bolt
11051	M12X120
11052	M16X120
11053	M20X175



Model SM

### Applications

- Lathes
- Machine Tools
- Graphic Equipment
- Small to Mid-sized Injection Molding Machines

Item No.	Model No.	Load (lbs)	Thickness (in)	Length (in)	Width (in)
46002	SM 61-14	1250	1.10	3.30	3.30
46004	SM 62-14	3300	1.20	4.80	4.80
46006	SM 63-14	5300	1.30	5.80	5.80
46008	SM 64-14	7500	1.30	6.80	6.80

\* Bolt extra, bolt includes one locking nut and washer

See our Online Specifications:  
[www.sunnexmounts.com/mounts/SM.htm](http://www.sunnexmounts.com/mounts/SM.htm)

# Leveling Mounts




## LL-Series

Sunnex LL leveling mounts are ideal for loads up to 4400 lbs. The LL series is fitted with a rubber pad designed to grip mounting surfaces, and has a solid base design.

The precision ball and socket design of the swivel connection provides a smooth low friction interface from the equipment to the floor. This deep socket joint prevents any debris from getting into the joint connection.

LL-Series Item number	Load Capacity (lbs)	Base Height, h (in)	Base Diameter, D (in)	Thread, d, L (in)
LL 10	2000	1.05	1.25	M12 – 1.75 x 75
LL 12	2500	1.15	1.75	M12 – 1.75 x 75
LL 20	4400	1.15	2.30	M14 – 2.0 x 100

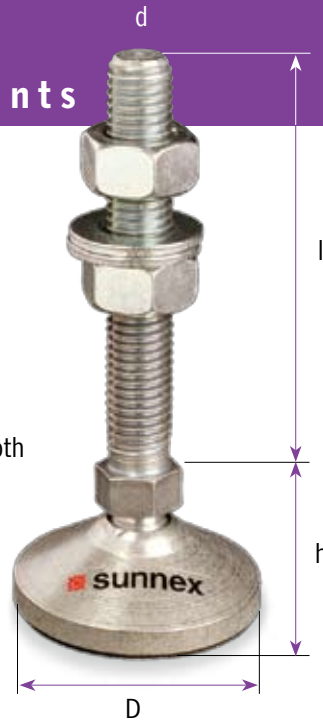

## LE-Series

The LE series consists of a rubber molding vulcanized onto a leveling bolt. The rubber molding has excellent friction on most any surface and provides a safe and dependable installation.

The minimal stud length is well suited for both open hole and blind hole applications. Each model comes complete with a nut and washer for leveling and locking in place.


Standard rubber molds are gray in color, however most are also available in a high durometer black rubber for heavy loads.

LE Series Item Number	Load Capacity (lbs)	Base Diameter, D (in)	Base Height, h (in)	Thread Height, L (in)	Thread Type, d (in)
LE 19-1*	90	1.81	0.59	1.50	M10 x 1.5
LE 19-2*	90	1.81	0.59	2.36	M10 x 1.5
LE 19-3*	170	1.81	0.59	1.50	M10 x 1.5
LE 19-4*	170	1.81	0.59	2.36	M10 x 1.5
LE 108	130	1.81	0.31	2.24	M8 x 1.25
LE 213	130	1.18	0.28	1.50	M10 x 1.5
LE 259	75	1.18	0.39	1.10	M6 x 1.00

\*Base Material Stainless Steel (SS) or Zinc Plated (ZP)

## Applications

- Assembly Stations
- Outside Maintenance Equipment (Motors, Pumps)
- Woodworking Machines
- Compressors
- Small Machines
- Office and Household Machinery

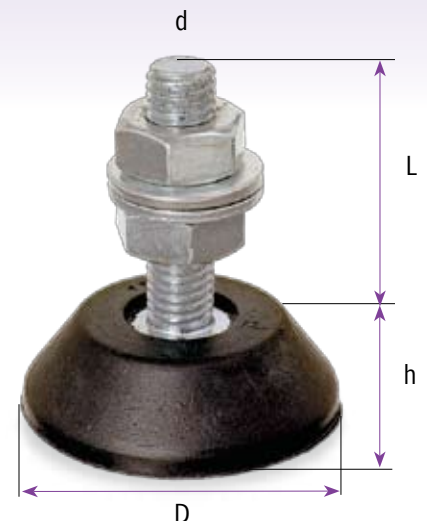

See our Online Specifications:  
[www.sunnexmounts.com/mounts/LL.htm](http://www.sunnexmounts.com/mounts/LL.htm)  
[www.sunnexmounts.com/mounts/LE.htm](http://www.sunnexmounts.com/mounts/LE.htm)